



# ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: HP #280  
Standard: EN300 220(TX)  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT:  
Mode: TX 434MHz  
Model: RFM64-434S2(10dBm)  
Manufacturer:

Polarization: Horizontal  
Power Source: DC 3.3V  
Date: 2014/03/15  
Time: 10:42:14  
Engineer Signature: PEI  
Distance: 3m

Note: 1#

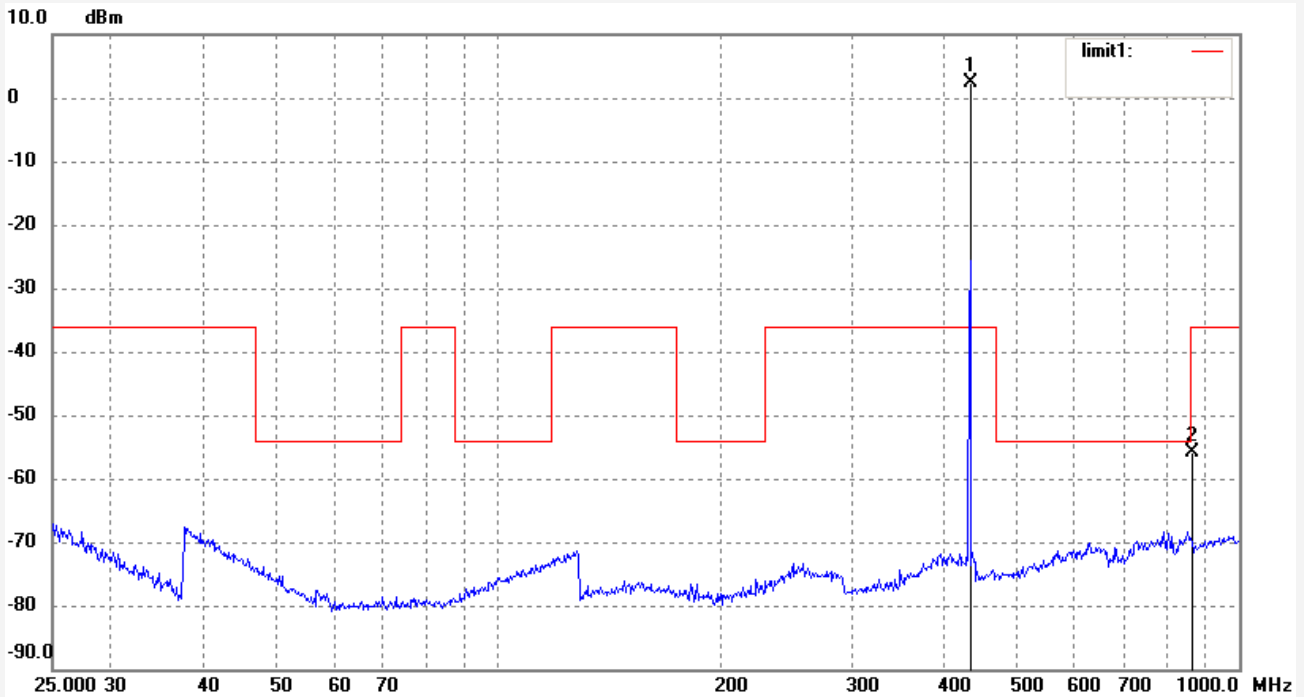

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	433.7194	-0.59	3.00	2.41	-36.00	38.41	peak			
2	868.0478	-63.95	8.11	-55.84	-36.00	-19.84	peak			



# ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: HP #281  
Standard: EN300 220(TX)  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT:  
Mode: TX 434MHz  
Model: RFM64-434S2(10dBm)  
Manufacturer:

Polarization: Vertical  
Power Source: DC 3.3V  
Date: 2014/03/15  
Time: 10:43:27  
Engineer Signature: PEI  
Distance: 3m

Note: 1#

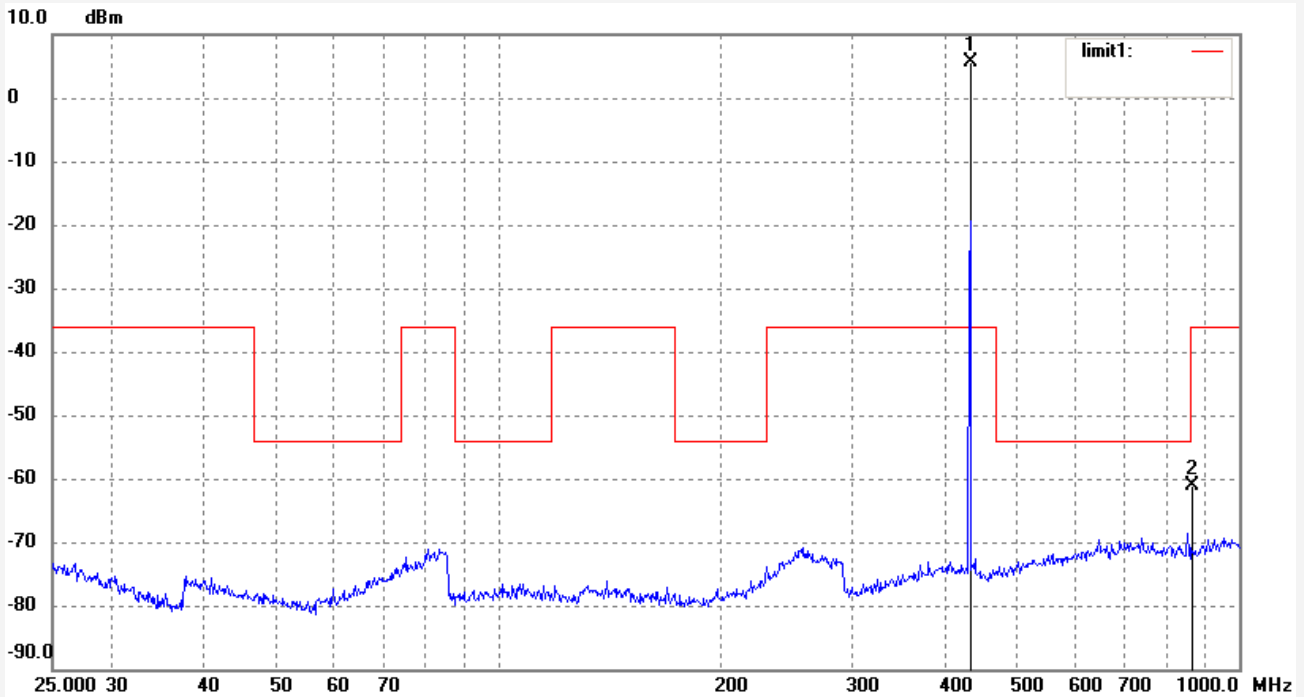

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	433.7194	3.59	2.16	5.75	-36.00	41.75	peak			
2	868.0478	-69.24	8.02	-61.22	-36.00	-25.22	peak			



# ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: HP #298  
Standard: EN300 220(TX)  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT:  
Mode: TX 434MHz  
Model: RFM64-434S2(10dBm)  
Manufacturer:

Polarization: Horizontal  
Power Source: DC 3.3V  
Date: 2014/03/15  
Time: 11:31:13  
Engineer Signature: PEI  
Distance: 3m

Note: 1#

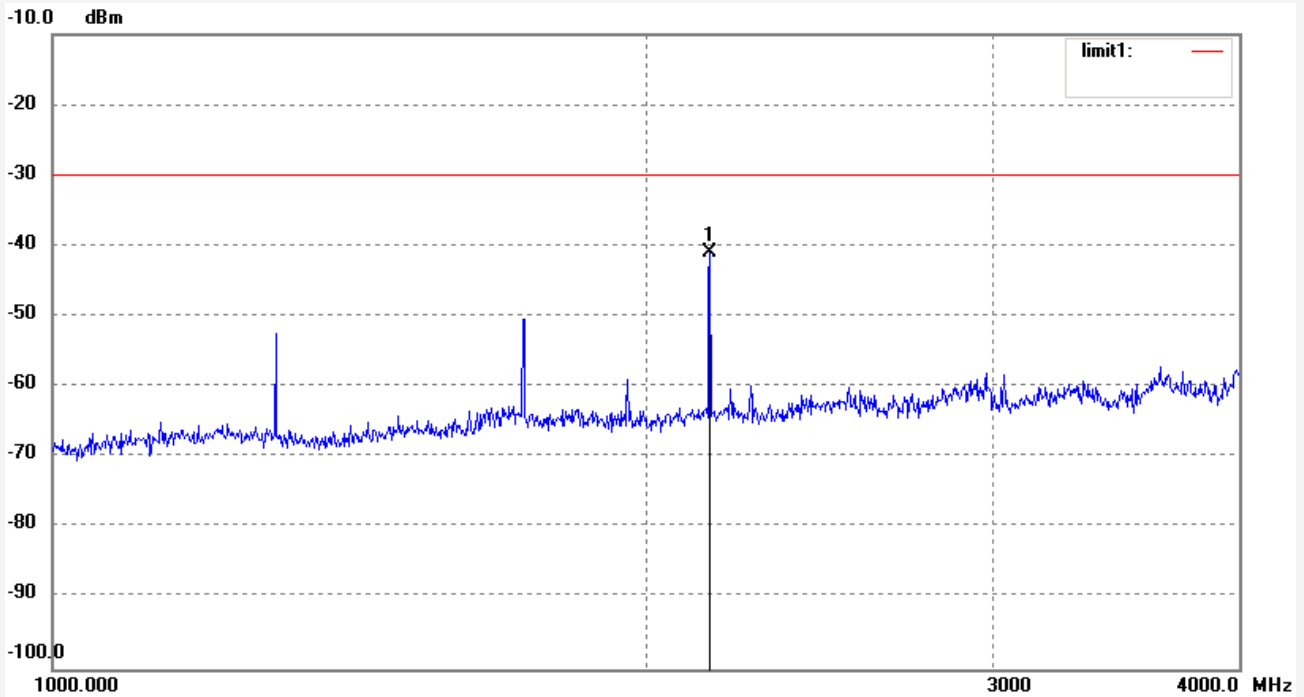

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2170.441	-41.60	0.72	-40.88	-30.00	-10.88	peak			



# ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: HP #299  
Standard: EN300 220(TX)  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT:  
Mode: TX 434MHz  
Model: RFM64-434S2(10dBm)  
Manufacturer:

Polarization: Vertical  
Power Source: DC 3.3V  
Date: 2014/03/15  
Time: 11:32:43  
Engineer Signature: PEI  
Distance: 3m

Note: 1#

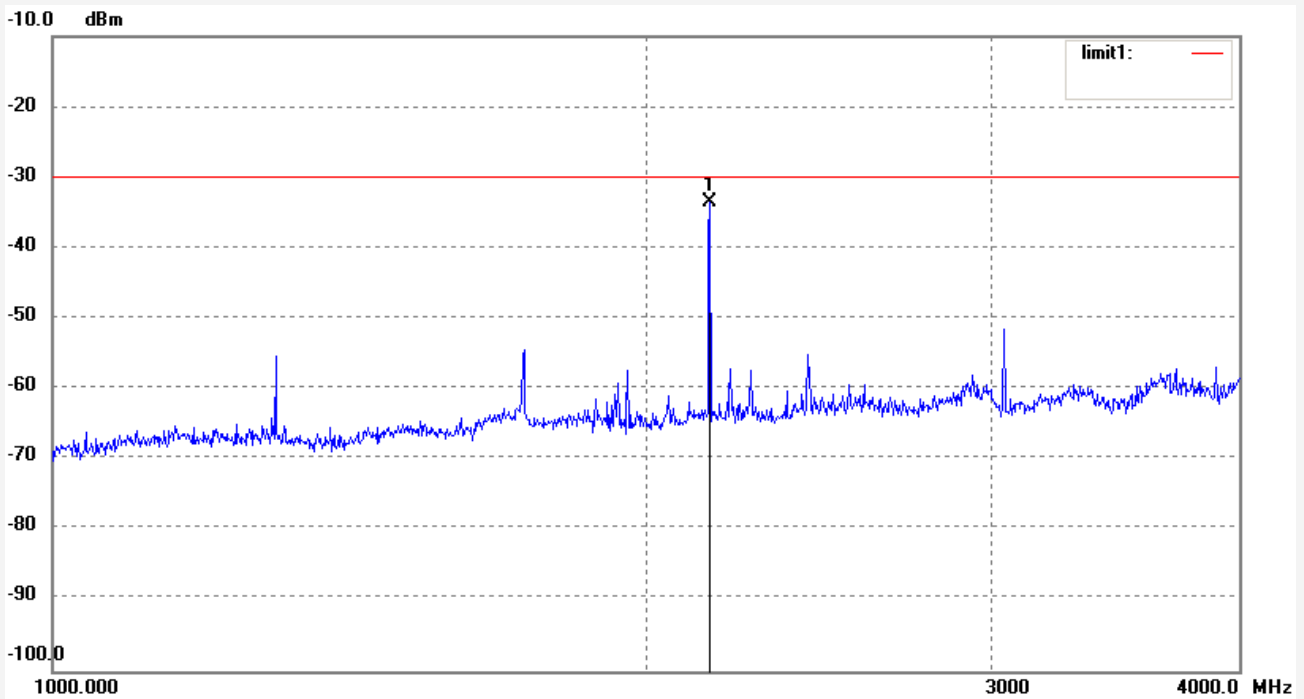

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2170.441	-34.26	0.72	-33.54	-30.00	-3.54	peak			