




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

|                                   |                          |
|-----------------------------------|--------------------------|
| Job No.: hp #82                   | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated | Power Source: DC 3V      |
| Test item: Radiation Test         | Date: 13/11/14/          |
| Temp.( C)/Hum.(%) 23 C / 48 %     | Time: 18/21/02           |
| EUT:                              | Engineer Signature: PEI  |
| Mode: TX 433MHz                   | Distance: 3m             |
| Model: RFM69HCW-433S2(5dBm)       |                          |
| Manufacturer:                     |                          |

Note: -2

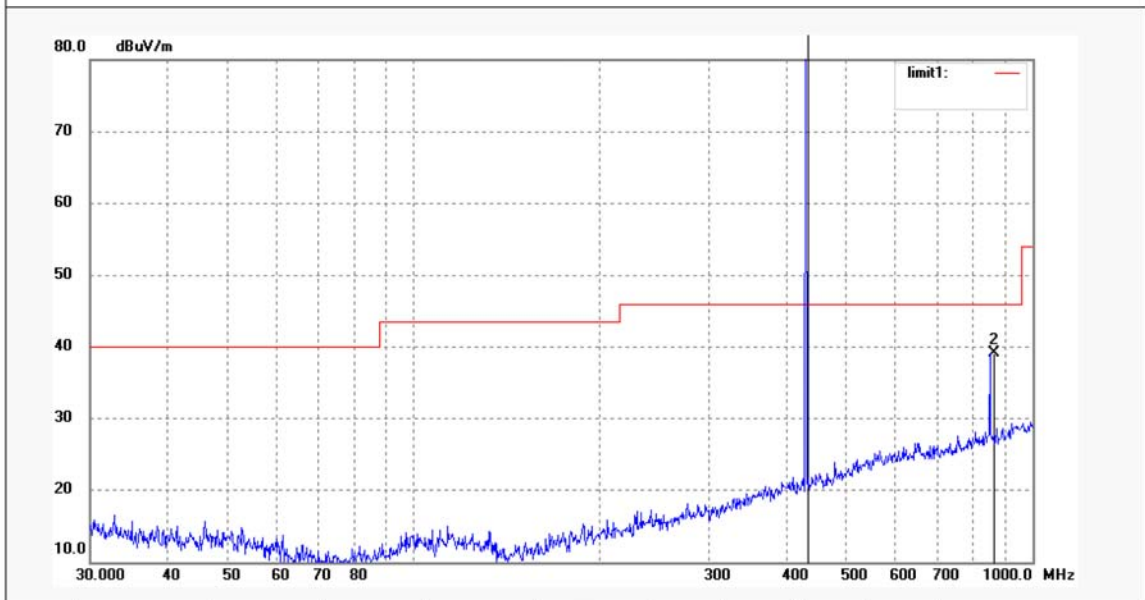

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 433.9200    | 104.13           | -5.96       | 98.17           | 46.00          | 52.17       | peak     |             |               |        |
| 2   | 867.8300    | 38.04            | 1.04        | 39.08           | 46.00          | -6.92       | peak     |             |               |        |




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

|                                   |                         |
|-----------------------------------|-------------------------|
| Job No.: hp #83                   | Polarization: Vertical  |
| Standard: FCC Class B 3M Radiated | Power Source: DC        |
| 3V Test item:                     | Radiation Test Date:    |
| 13/11/14/                         |                         |
| Temp.( C)/Hum.(%) 23 C / 48 %     | Time: 18/22/06          |
| EUT:                              | Engineer Signature: PEI |
| Mode: TX 433MHz                   | Distance: 3m            |
| Model: RFM69HCW-433S2(5dBm)       |                         |
| Manufacturer:                     |                         |

Note: -2

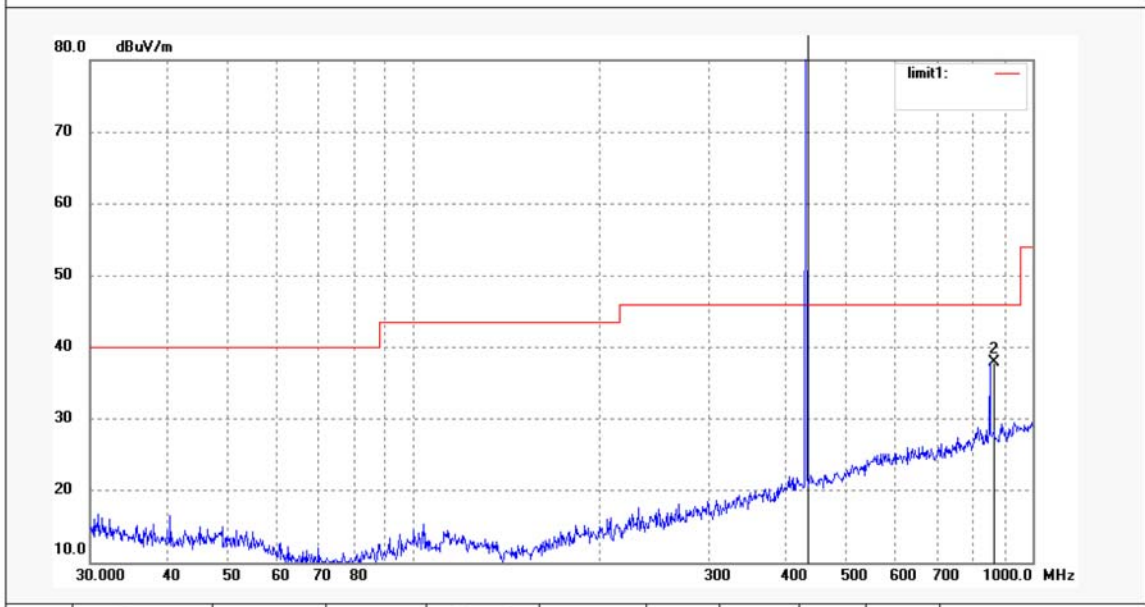

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 433.9200    | 104.79           | -5.96       | 98.83           | 46.00          | 52.83       | peak     |             |               |        |
| 2   | 867.8300    | 36.93            | 1.04        | 37.97           | 46.00          | -8.03       | peak     |             |               |        |




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

|                               |                          |
|-------------------------------|--------------------------|
| Job No.: hp #88               | Polarization: Horizontal |
| Standard: FCC PK              | Power Source: DC 3V      |
| Test item: Radiation Test     | Date: 13/11/14/          |
| Temp.( C)/Hum.(%) 23 C / 48 % | Time: 18/38/10           |
| EUT:                          | Engineer Signature: PEI  |
| Mode: TX 433MHz               | Distance: 3m             |
| Model: RFM69HCW-433S2(5dBm)   |                          |
| Manufacturer:                 |                          |

Note: -2

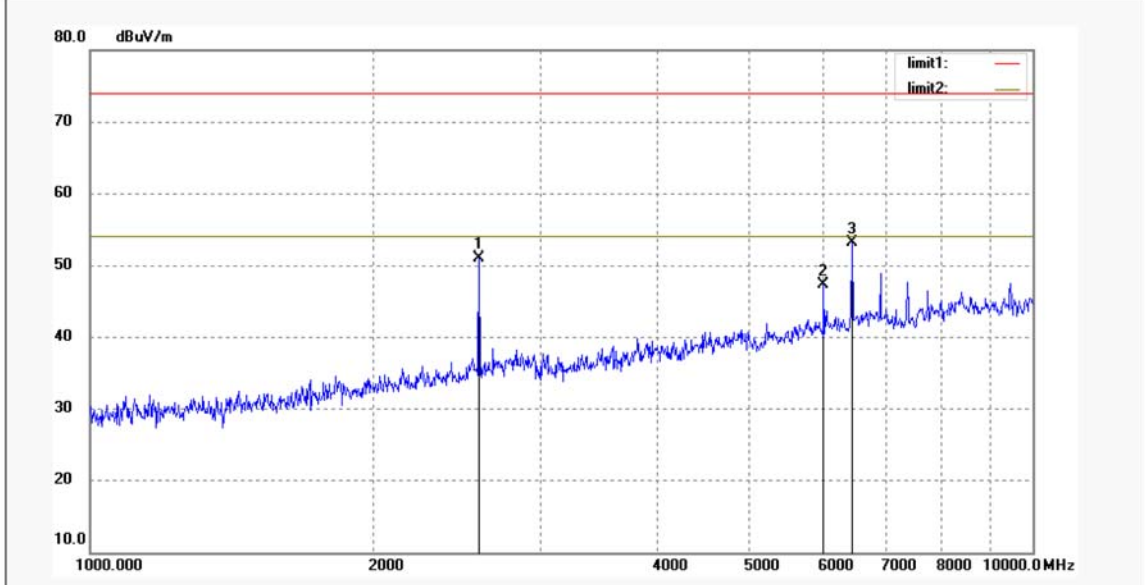

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 2587.559    | 57.87            | -6.77       | 51.10           | 74.00          | -22.90      | peak     |             |               |        |
| 2   | 6004.117    | 45.06            | 2.30        | 47.36           | 74.00          | -26.64      | peak     |             |               |        |
| 3   | 6436.661    | 50.32            | 2.77        | 53.09           | 74.00          | -20.91      | peak     |             |               |        |




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

|                               |                         |
|-------------------------------|-------------------------|
| Job No.: hp #89               | Polarization: Vertical  |
| Standard: FCC PK              | Power Source: DC        |
| 3V Test item:                 | Radiation Test Date:    |
| 13/11/14/                     |                         |
| Temp.( C)/Hum.(%) 23 C / 48 % | Time: 18/39/54          |
| EUT:                          | Engineer Signature: PEI |
| Mode: TX 433MHz               | Distance: 3m            |
| Model: RFM69HCW-433S2(5dBm)   |                         |
| Manufacturer:                 |                         |

Note: -2

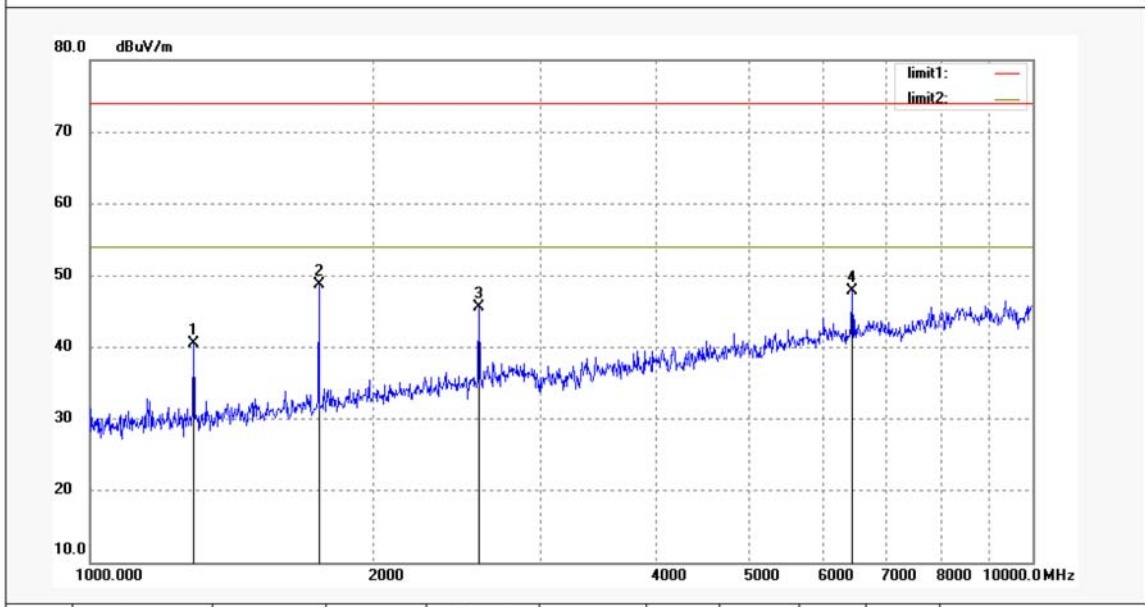

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 1287.563    | 52.72            | -12.22      | 40.50           | 74.00          | -33.50      | peak     |             |               |        |
| 2   | 1748.634    | 59.22            | -10.45      | 48.77           | 74.00          | -25.23      | peak     |             |               |        |
| 3   | 2587.559    | 52.30            | -6.77       | 45.53           | 74.00          | -28.47      | peak     |             |               |        |
| 4   | 6436.661    | 45.07            | 2.77        | 47.84           | 74.00          | -26.16      | peak     |             |               |        |