



Condition : EN300220 868MHZ TRAN 3m HORIZONTAL
 EUT/Model : RFM22-869
 Job No. :
 Test Mode :

Frequency MHz	Cable Loss dB	Antenna Factor dB/m	Preamplifier Factor dB	Read Level dBuV	level dBuV/m	Limit Line dBuV/m	Over Limit dB
867.110	22.78	10.73	0.00	-18.90	14.60	-36.00	50.60

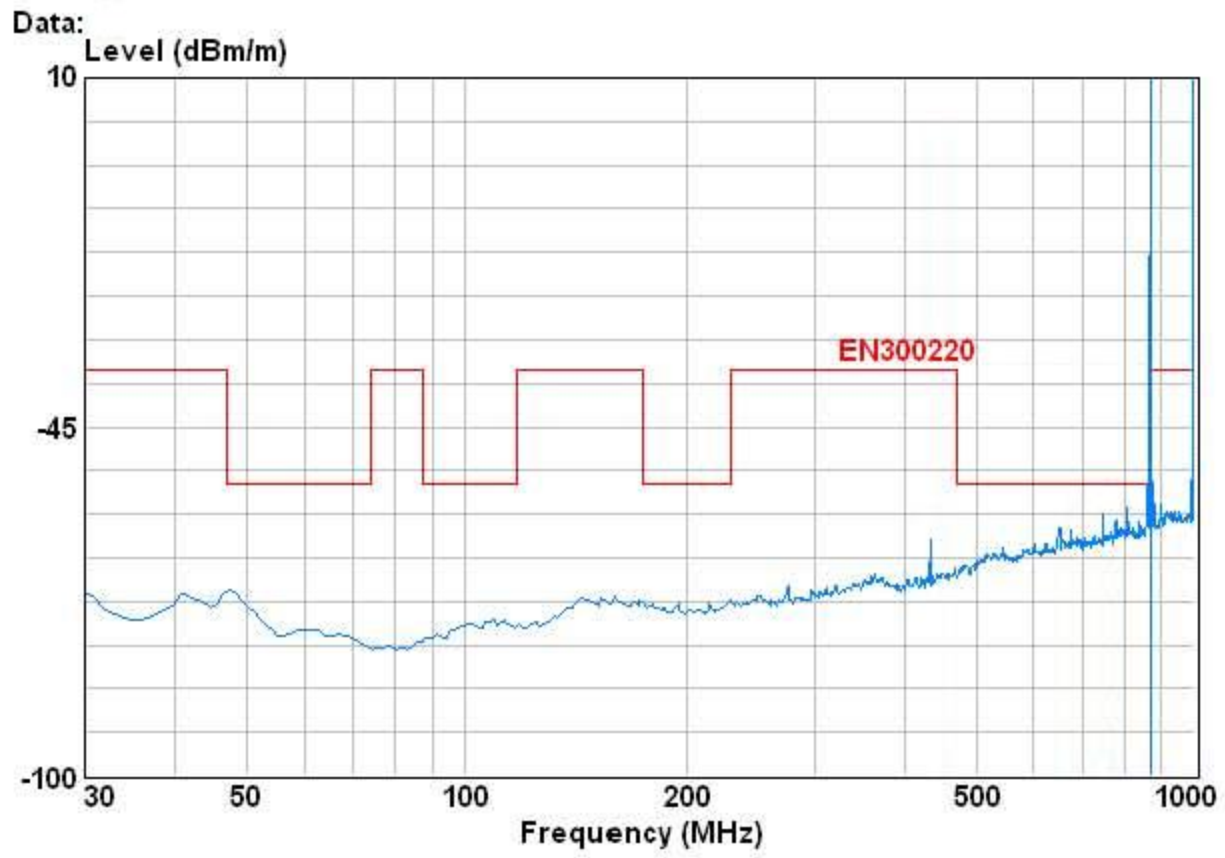


Condition : EN300220 868MHZ TRAN 3m VERTICAL
 EUT/Model : RFM22-869
 Job No. :
 Test Mode :

Frequency MHz	Cable Loss dB	Antenna Factor dB/m	Preamp Factor dB	Read Level dBuV	level dBuV/m	Limit Line dBuV/m	Over Limit dB
867.110	22.78	10.73	0.00	-21.52	11.99	-36.00	47.99

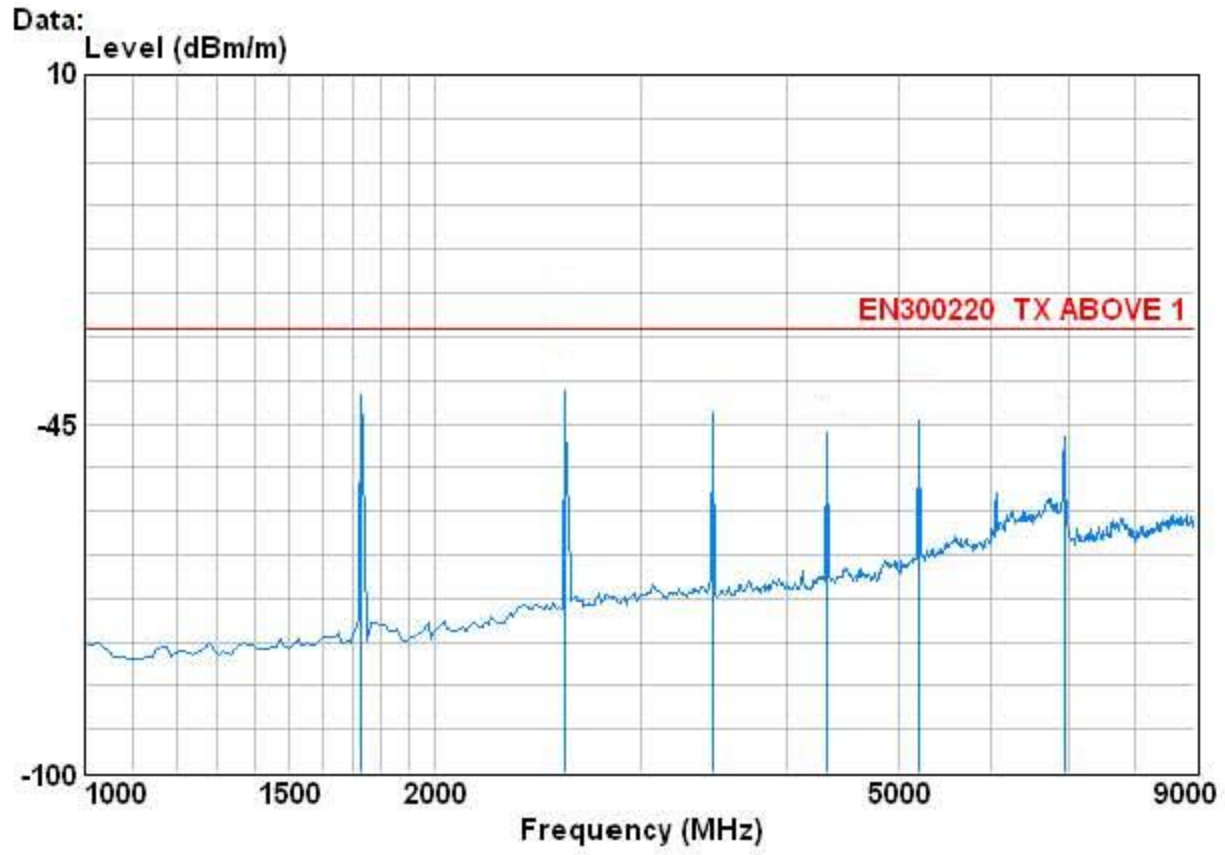

Condition : EN300220 TX ABOVE 1 3m ANT3117 (>1G) o1 HORIZONTAL
 EUT/Model : RFM22-869
 Job No. :
 Test Mode :

Frequency MHz	Cable Loss dB	Antenna Factor dB/m	Preamplifier Factor dB	Read Level dBuV	level dBuV/m	Limit Line dBuV/m	Over Limit dB
1728.000	27.80	5.21	39.65	-34.17	-40.81	-30.00	-10.81
2592.000	30.69	6.06	38.99	-37.78	-40.03	-30.00	-10.03
3456.000	32.49	7.25	39.54	-43.50	-43.31	-30.00	-13.31
4344.000	33.61	8.85	40.25	-48.71	-46.51	-30.00	-16.51
5208.000	34.79	11.73	41.19	-49.74	-44.41	-30.00	-14.41
6944.000	37.03	13.66	40.78	-56.96	-47.05	-30.00	-17.05

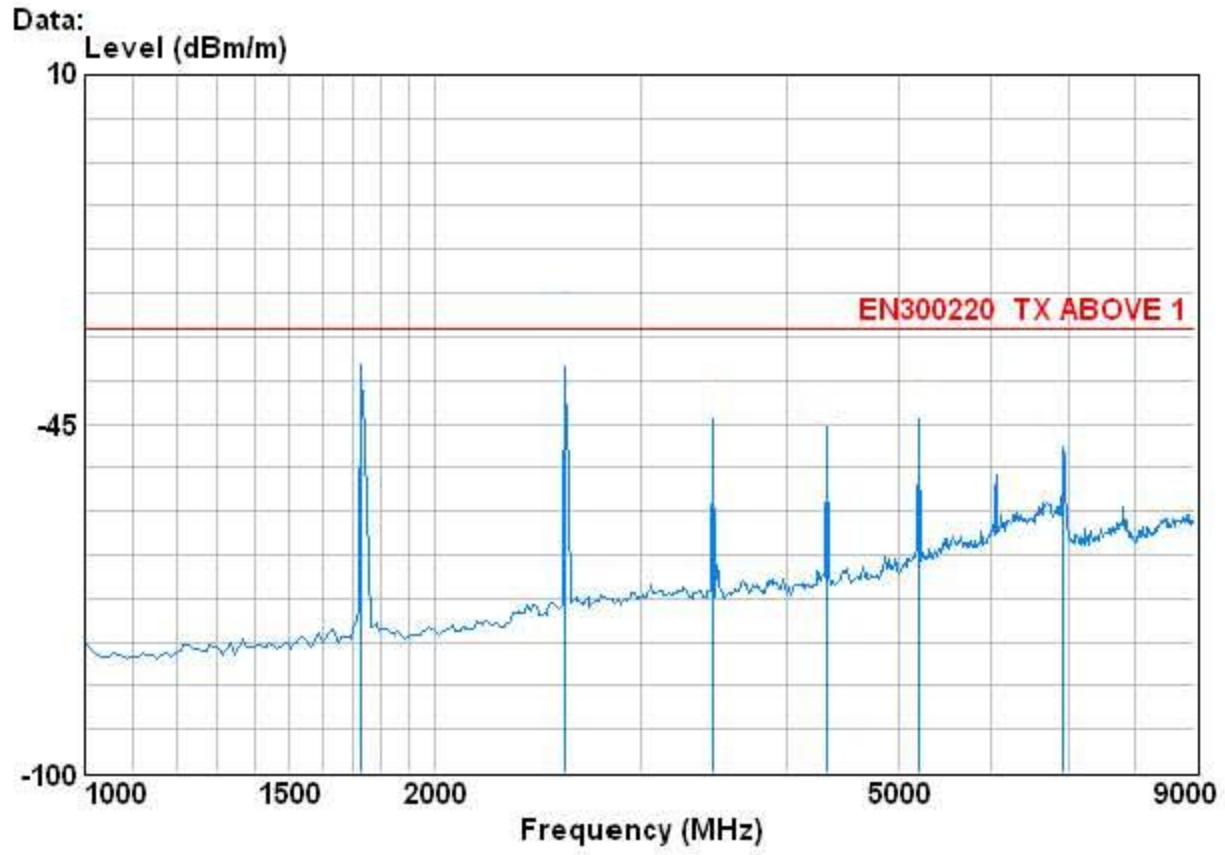

Condition : EN300220 TX ABOVE 1 3m ANT3117 (>1G) o1 VERTICAL
 EUT/Model : RFM22-869
 Job No. :
 Test Mode :

Frequency MHz	Cable Loss dB	Antenna Factor dB/m	Preamplifier Factor dB	Read Level dBuV	level dBuV/m	Limit Line dBuV/m	Over Limit dB
1728.000	27.80	5.21	39.65	-28.41	-35.05	-30.00	-5.05
2592.000	30.69	6.06	38.99	-33.18	-35.43	-30.00	-5.43
3456.000	32.49	7.25	39.54	-44.24	-44.05	-30.00	-14.05
4344.000	33.61	8.85	40.25	-47.65	-45.44	-30.00	-15.44
5208.000	34.79	11.73	41.19	-49.66	-44.34	-30.00	-14.34
6936.000	37.03	13.66	40.78	-58.47	-48.56	-30.00	-18.56